



Filtering Landfill Gas for Energy

BACKGROUND

Having thousands of landfills in the United States can often be perceived as both a health issue and an eyesore. However, landfills and their build-up of waste can have a positive outcome. Over time, the waste eventually decomposes and produces landfill gas (LFG.)

LFG is composed of 55 percent methane, 45 percent carbon dioxide (CO₂), along with small amounts of nitrogen, oxygen, hydrogen, less than one percent nonmethane organic compounds, and trace amounts of inorganic compounds. LFG gas causes local smog, health and safety issues and quite simply many unpleasant odors. Additionally, methane is a potent greenhouse gas that contributes to global climate change.

THE FACTS

Researchers have found that the same methane that comes from landfills can be turned into usable energy. Vertical wells are placed throughout a landfill to extract the gas. A compressor then uses suction to pipe the gas into one central location. The gas is treated to remove particulate matter, moisture, carbon dioxide and often trace gases. The gas is then ready to be used as a form of energy.

There are two primary uses for landfill gas. The first and simplest is a medium-Btu gas (approximately 550 Btu per standard cubic foot). This gas can be used or sold for industrial boilers-burners, cogeneration (heat and electricity), electrical generation, on-site space heating and/or hot water heating, lighting and recreational uses. When used for these applications, the only processing required is water and particulate removal.


The second use is as a high-Btu gas (approximately 1,000 Btu per standard cubic foot after processing to remove the carbon dioxide). Pipeline quality gas (high-Btu gas) can be used for any application for which natural gas is used. However, in addition to moisture and particulate removal, processing includes CO₂ and trace compound removal.

Converting landfill gas benefits the landfill operators, communities and industrial users. The Environmental Protection Agency actively promotes the conversion of LFG to energy. There are many current projects, and more planned for the future, for converting LFG into energy.



Benefits of Landfill Gas (LFG) Conversion


- Turns gas produced by waste into usable energy (electricity, heat, steam)
- Reduces greenhouse gas emissions
- Reduces local pollution, safety hazards, and unpleasant odors
- Possible decrease in energy costs

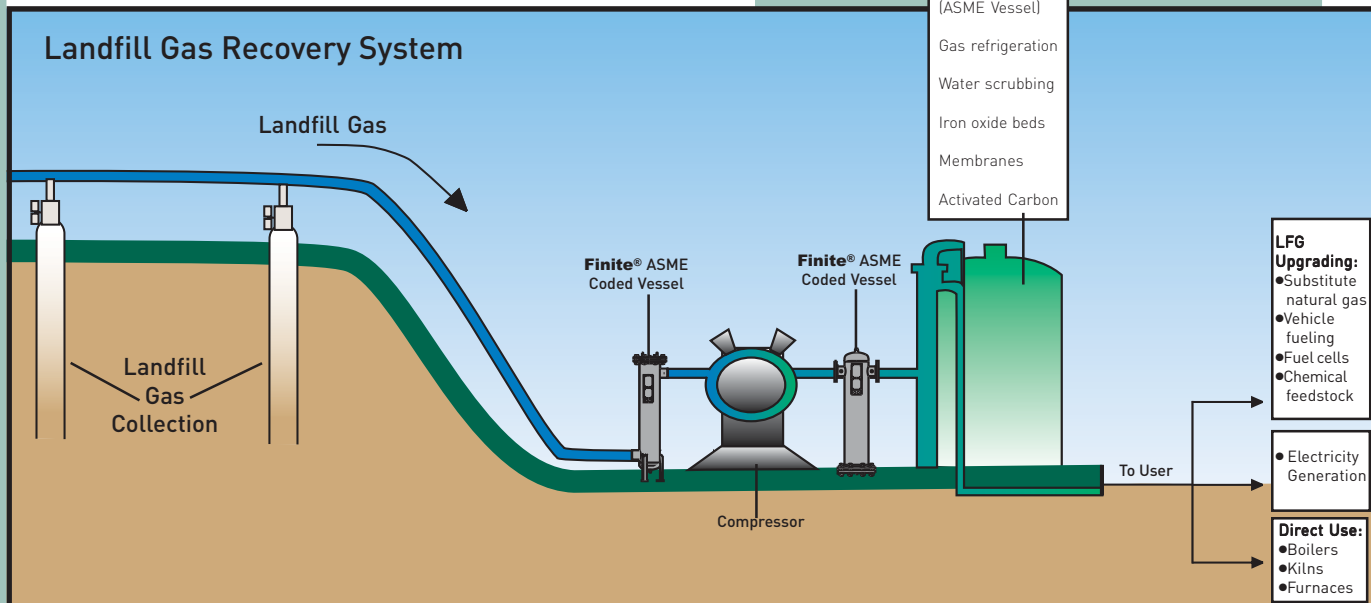

Marketing Application Publication

MAP

Possible effects on a LFG system without the proper filtration

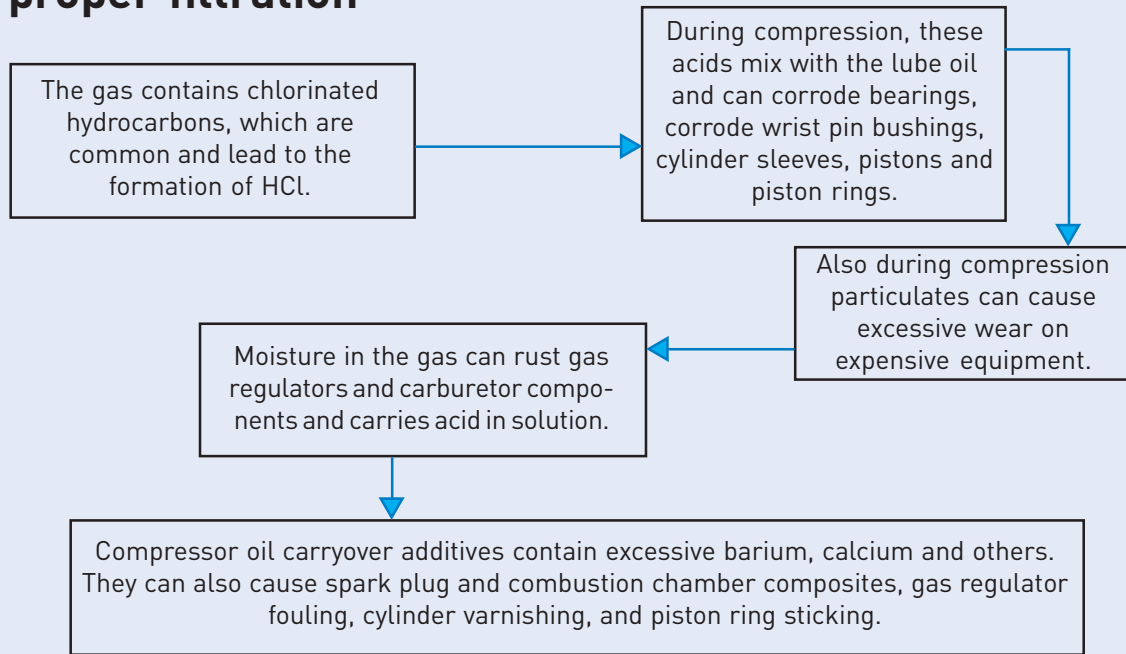

THE **Finite**® SOLUTION

Finite® Filter offers an array of filters sized to handle any landfill gas flow and several media choices to meet LFG application demands.



Finite® Filter offers an array of filters sized to handle any landfill gas flow and several media choices to meet LFG application demands.

Filter housings are constructed from carbon steel and stainless steel. Choices of filter media types include glass fiber for coalescing liquids, cellulose for particulate removal and activated carbon materials for oil vapor and hydrocarbon removal. Filter element ratings are available from 100 micron down to 0.01 micron.

Finite's new grade 7CVP pleated glass fiber media (0.5 micron, 99.5% efficiency) is ideal for lower pressure (blowers and compressor inlet) applications. The glass fiber for this media is saturated with fluorocarbon to minimize pressure drop.

Please see Finite's catalog 1300-400/USA for detailed filter housing and element specifications.

Please contact our technical assistance department should your application require special modifications.

Parker Hannifin Corporation
 Finite Filter Operation
 500 Glaspie St.
 Oxford, MI 48371
 PH: 248-628-6400
 FX: 248-628-1850
<http://www.parker.com/finitefilter>